
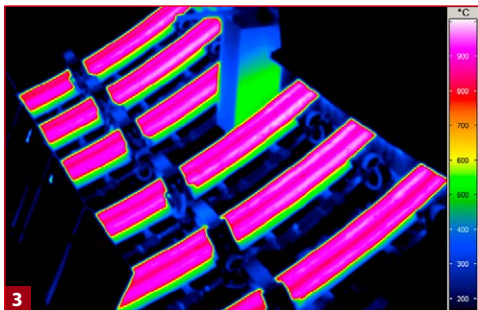
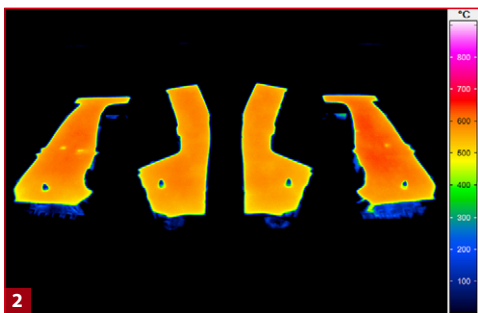


# PIR uc SWIR HD 800

Stationary Thermographic Camera for Industrial Use

## INFRAtec.

Europe's leading specialist for infrared sensors and measurement technology

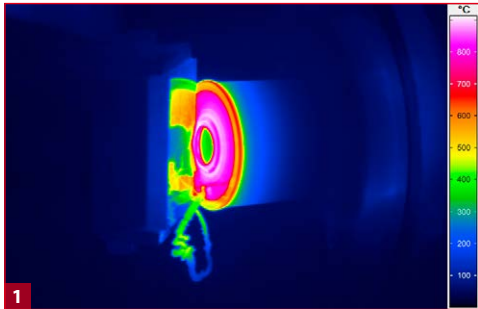

- 1) Metal forming
- 2) Heated sheet metal before the pressing process
- 3) Slab production

Thermographic camera with (1,280 × 1,024) IR pixels

Short wave spectral range (0.78 ... 1.1)  $\mu\text{m}$

Frame rate up to 60 Hz

Large temperature measuring range of (650 ... 1,000)  $^{\circ}\text{C}$

Robust industrial camera with a high protection degree (IP67)

Compact light metal housing

Process and trigger interface



[www.InfraTec.eu](http://www.InfraTec.eu)

Made in Germany



Spectral range	(0.78 ... 1.1) $\mu\text{m}$
Detector	High-dynamic Si-CMOS array
Detector format (IR pixels)	(1,280 $\times$ 1,024)
Temperature measuring range	(650 ... 1,000) $^{\circ}\text{C}$
Measurement accuracy	$\pm 1^{\circ}\text{C}$ or $\pm 1\%$
Temperature resolution	$< 1\text{ K}$
Frame rate (full-frame)	60 Hz
Wide-angle lenses	4.8 mm (HFOV 72.5°); 8.0 mm (HFOV 45.0°)
Standard lens	12.5 mm (HFOV 31.5°)
Data interface	GigE Vision up to 60 Hz
Focus	Fixed focus, approx. (0.4 m ... $\infty$ )
Dynamic range	12 bit
Interfaces	GigE Vision, RS232
Power supply	(7 ... 25) V DC, Power over Ethernet (PoE)
Power consumption (at 12 V DC)	3.4 W
Storage and operation temperature	(-20 ... 70) $^{\circ}\text{C}$ ; (0 ... 55) $^{\circ}\text{C}$
Protection degree	IP67
Dimensions, weight	(205 $\times$ 96 $\times$ 96) mm; 2.0 kg
Further functions	Shutter-free operation, temperature alarm
Analysis and evaluation software*	IRBIS <sup>®</sup> 3, IRBIS <sup>®</sup> 3 plus, IRBIS <sup>®</sup> 3 professional, IRBIS <sup>®</sup> 3 view, IRBIS <sup>®</sup> 3 remote, IRBIS <sup>®</sup> 3 online, IRBIS <sup>®</sup> 3 process, IRBIS <sup>®</sup> 3 vision

\* Depending on model

The **high-resolution PIR uc SWIR HD 800** is a very compact thermographic camera designed for stationary use, which works in the **short-wave spectral range** and is used preferably for **contactless temperature measurement on metal surfaces** because of its spectral characteristics. The robust industrial camera is based on a high-resolution Si-CMOS array **with (1,280  $\times$  1,024) IR pixels** and enables images in HD quality. It is suitable for solving a wide range of measuring tasks in production and development – including process monitoring, quality assurance and product development. The PIR uc SWIR HD 800 demonstrates its strengths, for example, as a **component of PRESS-CHECK** – in the automation solution of InfraTec for quality assurance during press hardening. It is used there for measuring the surface temperature distribution of the metal sheets to be machined before the pressing process.

Already the outer appearance reveals the **perfect suitability for stationary industrial use**. The **high-quality light metal housing** can be integrated easily into numerous process environments thanks to its compact dimensions. The **protection degree IP67** enables installations even in environments where dirt and high temperatures are commonplace. The detector with its very high geometric resolution offers the possibility of detecting even the smallest details on large measurement objects quickly and precisely. Focusing on temperature measurements in the short-wave spectral range of (0.78 ... 1.1)  $\mu\text{m}$  ensures that physically determined measurement errors, which occur due to the emission properties of metallic measurement objects, are minimised.

The **evaluation and analysis programs of the IRBIS<sup>®</sup> 3 software family** round off the flexible character of the PIR uc SWIR HD 800. Based on IRBIS<sup>®</sup> 3, IRBIS<sup>®</sup> 3 plus and IRBIS<sup>®</sup> 3 professional provide powerful tools for camera control and data acquisition that enable additional freedom for easy adjustment to the systems on site.

### Application examples

- Monitoring during the press hardening of sheet metal parts (PRESS-CHECK)
- Quality inspection in the metalworking industry
- High temperature applications

### Order information

Item number	Thermographic system with lenses
M92717	PIR uc SWIR HD 800 (1,280 $\times$ 1,024) IR pixels; 4.8 mm
M94860	PIR uc SWIR HD 800 (1,280 $\times$ 1,024) IR pixels; 8.0 mm
M92730	PIR uc SWIR HD 800 (1,280 $\times$ 1,024) IR pixels; 12.5 mm



#### Headquarters

**InfraTec GmbH**  
**Infrarotsensorik und Messtechnik**  
 Gostritzer Str. 61 – 63  
 01217 Dresden / GERMANY  
 Phone +49 351 871-8630  
 E-mail thermo@InfraTec.de

#### USA office

**InfraTec infrared LLC**  
 5048 Tennyson Pkwy.  
 Plano TX 75024 / USA  
 Phone +1 844-226-3722 (toll free)  
 E-mail thermo@InfraTec-infrared.com